



PANAGET

manufacture française de parquet
DEPUIS 1929



Daylight whites

No 1007268

FRENCH OAK ZENITUDE LINEN, SONATE 140 TONGUE & GROOVE / 14 MM

Caracteristics

Species: French oak **Origin:** France

Grade: Zenitude - light and dark wood, black knots, filled knots, partially opened knots, discolouration, cracks, splits, sapwood. Grade with all peculiarities of the wood without limitation. The size of the knots is proportional to the width of the planks.

Finish: Linen - brushed, light white matt lacquered / Ecostrong lacquer - Shine (gloss): 4/6

While we take the greatest care in manufacturing our flooring, there can sometimes be slight variations in colouring. So it's important to factor in margin of 2-5% more than the actual you're covering. This means you won't run out of planks and you will be sure to enjoy a beautiful finished product.

Design

Solid single plank under the patent EN 13226
Tongue & Groove

Description

Width: 140 mm
Length: 400 to 1300 mm
Thickness: 14 mm
Top layer: 7.0 mm
Core:
Counterbalance: no
Profile: 4 bevels

Packing

Sqm/pack: 1.64
Pack/pallet: 40
Sqm/pallet: 65.60
Weight/sqm: 10.7 kg
Weight/pallet: 701.9 kg





Installation method



Glue down installation
under the patent DTU
51.2



Fully glue down using
Presto PM



PANAGET - 3 rue d'Orgères - 35230 Bourgarré - FRANCE
tel: +33 (0)2 99 05 77 77 // fax: +33 (0)2 99 57 73 55 // www.panaget.com

DECLARATION OF PERFORMANCE

NO 1007268



Unique identification code of the product-type: Sonate 140 Tongue & Groove, 14 mm, French oak

Intended use/es: Solid single plank under the patent EN 13226

Glue down installation under the patent DTU 51.2

Manufacturer: PANAGET - 3 rue d'Orgères 35230 Bourgbarré / FRANCE

System/s of Assessment and Verification of Constancy of Performance: No4

Harmonised standard: EN 14342 : 2013

Declared performances:

Essential features	Performances	Appropriate Technical Documentation and/or Specific Technical Documentation
Reaction to fire	Cfl-s1	EN 14342 : 2013
Features for this classification: - Average minimum density (Kg/m ³) - Average thickness (mm) - Intended use, fitting mode	650 14 Glued to the subfloor	
Formaldéhyde emission	E1	
Content of pentachlorophénol	PCP ≤ 5 ppm	
Release of other dangerous substances: - VOC* emissions (Decree No 2011-321) - CMR 1&2** emissions (Decree No DEV0910046A)	Class A+ < 1µg/m ³	ISO 16000
Breaking strength	N/A	-
Slipperiness	N/A	-
Thermal conductivity (W/m.K)	0.17	EN 14342 / Chapter 4.7
Thermal resistance (m ² .K/W)	0.08	
Biological sustainability	Class 1	EN 335

RE2020 - Building Carbon Index: 8.5 kg.CO₂/m²

French environmental regulation : it aims to reduce the carbon footprint of new buildings over their estimated 50-year life cycle.

FDES 2022 - Life Cycle impact assessment: 1.4 kg éq. CO₂/m²

N/A : Not Applicable

*VOC: Volatile Organic Compounds


**CMR 1&2: Carcinogenics, Mutagens or Reproductive toxin of 1&2 category

The performances of product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011 under the sole responsibility of the manufacturer identified above.

Signed for and behalf of the manufacturer by: Carole FRANÇOIS - Executive Director

Bourgbarré, 16 december 2021

Carole FRANÇOIS

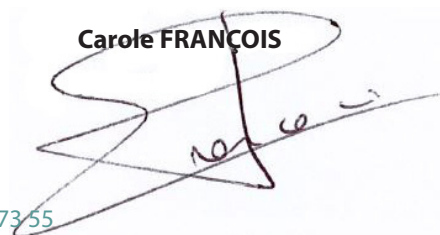

3 rue d'Orgères - 35230 Bourgbarré - FRANCE / tel: +33 (0)2 99 05 77 77 - fax: +33 (0)2 99 57 73 55

Entreprise dont le système qualité a été **certifié ISO 9001** par Bureau Veritas Certification.

SAS au capital de 4 957 200 € - RCS Rennes B 402 853 220 - Siret : 402 853 220 000 34 - APE : 1622 Z - No TVA : FR 0640 2853220

www.panaget.com